
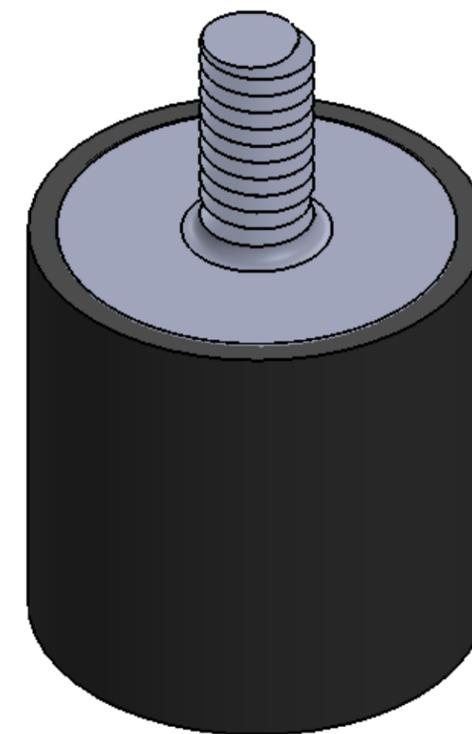
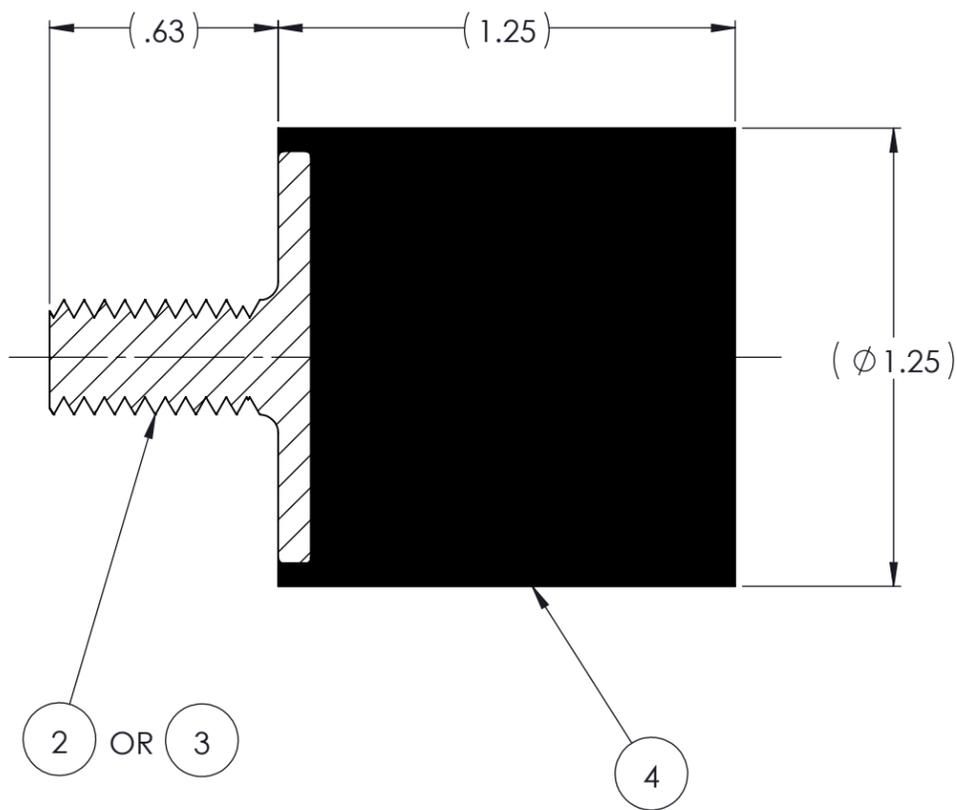


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	8/8/2014	BS

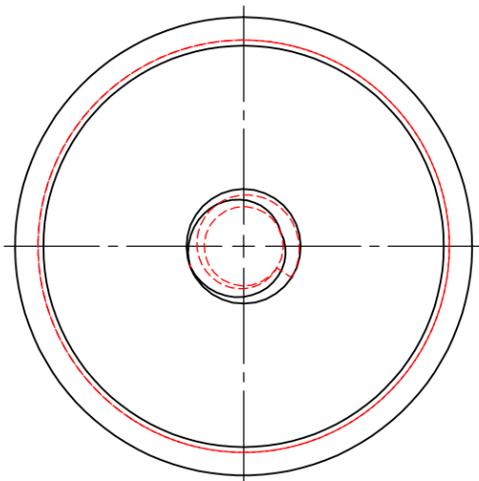

NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 40, 50, 60 OR 70 TO BE SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.
- 3 AVAILABLE WITH THREADS OF 5/16-18 UNC X 5/8" AND M8 X 1.25 X 5/8".

PROPRIETARY AND CONFIDENTIAL		SIGNATURE	DATE
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.	DRAWN	B. SENEAL	08/08/2014
	CHECK	S. BROWN	08/08/2014
	ENGR	B. SENEAL	08/08/2014
	QA		
	STRESS		
	APPR		

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 .X = ± 0.031  
 .XXX = ± 0.005  
 ANGLES = ± 1°  
 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994



**KARMAN RUBBER VIBRO-INSULATORS**  
 FOR CONTROLLING NOISE, SHOCK & VIBRATION

TITLE:		K134 SERIES VIBRO-INSULATOR	
		WWW.KARMAN.COM	
SIZE	CAGE CODE	DWG. NO.	REV
<b>B</b>		<b>K134</b>	<b>1</b>
DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT: 1.75 OZ. SHEET 1 OF 1

AR	ELASTOMER	K134-4		4
1	MK430-M8-5/8	MK430-M8-5/8		3
1	MK430-CC	MK430-CC		2
	K134	K134		1
QTY.	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM