




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	12/17/2014	BS
2	ADD HOLE DIMENSION AND REVISE NOTE 1 TO INCLUDE 30 DUROMETER ELASTOMER.	1/2/2015	BS
3	BASE PLATE THICKNESS IS .12.	2/10/2015	BS

D

C

B

A

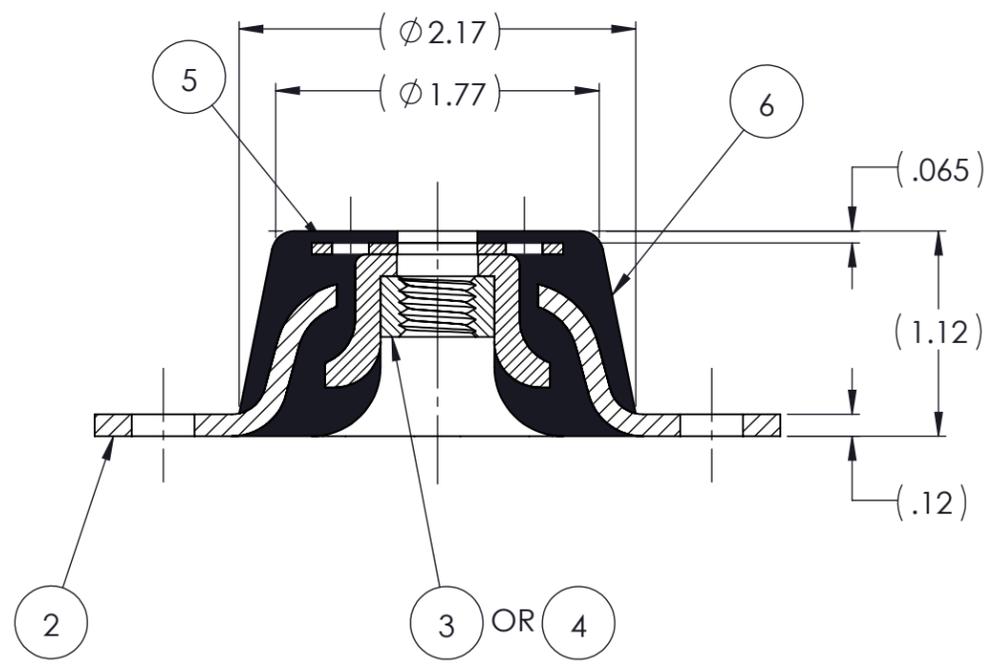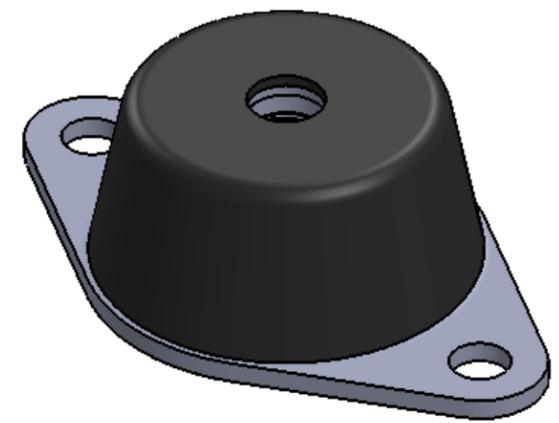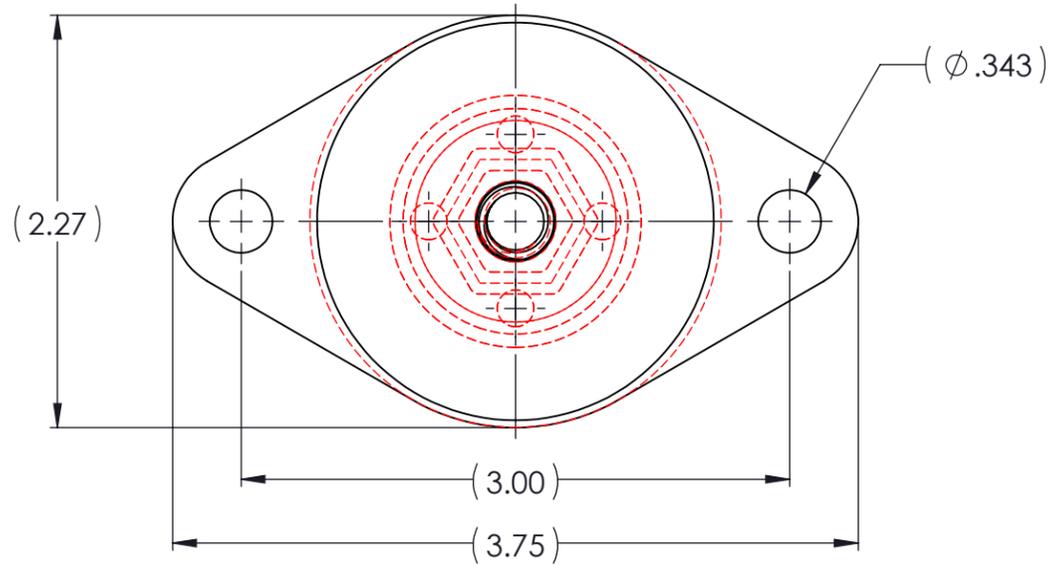

NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 30, 40, 50,60 OR 70 TO BE SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.
- 3 AVAILABLE WITH THREADS OF 3/8-16 UNC AND M8 X 1.25.

AR	ELASTOMER	K695-6	⚠	6
1	MK695W	MK695W		5
1	MK690I-M8	MK690I-M8		4
1	MK690I	MK690I		3
1	MK690B	MK690B		2
	K695	K695		1
QTY.	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM

PROPRIETARY AND CONFIDENTIAL	SIGNATURE	DATE	UNLESS OTHERWISE SPECIFIED:
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.</small>	DRAWN	B. SENECAI	DIMENSIONS ARE IN INCHES
	CHECK	S. BROWN	TOLERANCES:
	ENGR	B. SENECAI	.X =
	QA		.XX = ± 0.031
	STRESS		.XXX =
	APPR		ANGLES = ± 1°
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994



TITLE: **K695 SERIES VIBRO-INSULATOR**
WWW.KARMAN.COM

SIZE	CAGE CODE	DWG. NO.	REV
B		K695	3
DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT: 6.3 OZ.
			SHEET 1 OF 1