
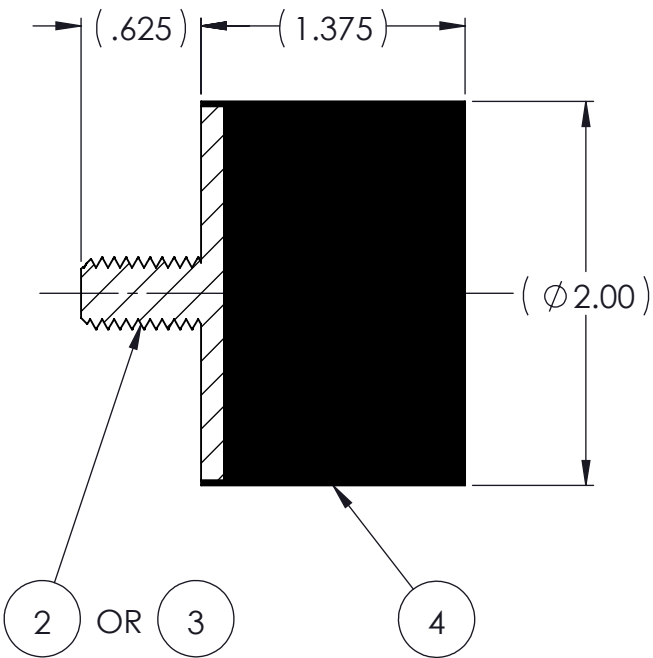
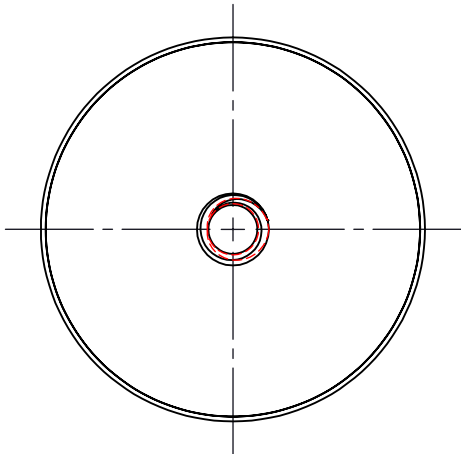


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	10/20/2014	BS

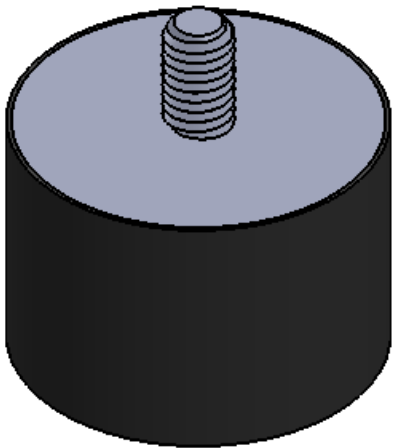

NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 40, 50, 60 OR 70 TO BE SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.
- 3 AVAILABLE WITH THREADS OF 3/8-16 UNC AND M10 X 1.5.

AR	ELASTOMER	K1662-4		4
1	MK650-M10	MK650-M10		3
1	MK650	MK650		2
	K1662	K1662		1
QTY.	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM

PROPRIETARY AND CONFIDENTIAL <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.</small>	SIGNATURE		DATE	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .X = .XX = ± 0.031 .XXX = ANGLES = ±1° INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994
	DRAWN	B. SENECAL	10/20/2014	
	CHECK	S. BROWN	10/20/2014	
	ENGR	B. SENECAL	10/20/2014	
	QA			
	STRESS			
	APPR			

KARMAN RUBBER VIBRO-INSULATORS®
FOR CONTROLLING NOISE, SHOCK & VIBRATION

B	SIZE	CAGE CODE
	DO NOT SCALE DRAWING	

TITLE: K1662 SERIES VIBRO-INSULATOR WWW.KARMAN.COM			
DWG. NO. K1662		REV 1	
SCALE: 1:1	WEIGHT: N/A	SHEET 1 OF 1	