
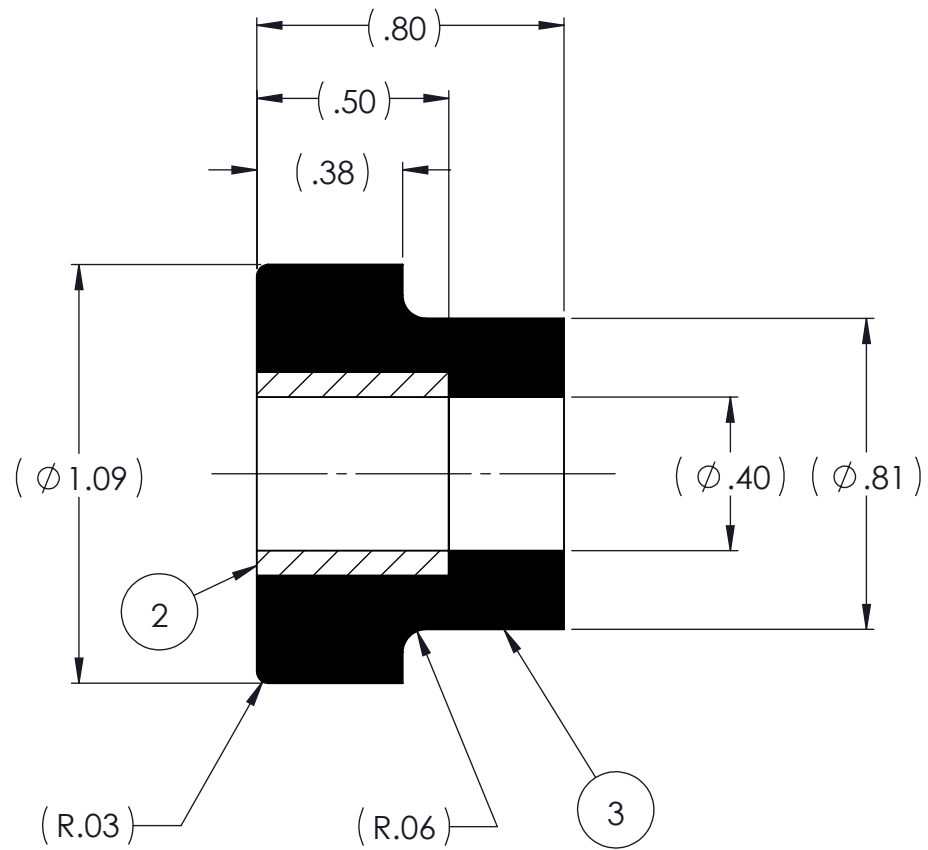


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	12/23/2014	BS
2	FLANGE THICKNESS IS .38, WAS .21. LENGTH IS .80, WAS .92. ADD .50 LENGTH DIMENSION TO BUSHING. SMALL OD IS ϕ .81, WAS ϕ .76. ADD THRU HOLE DIMENSION OF ϕ .40.	2/10/2015	BS

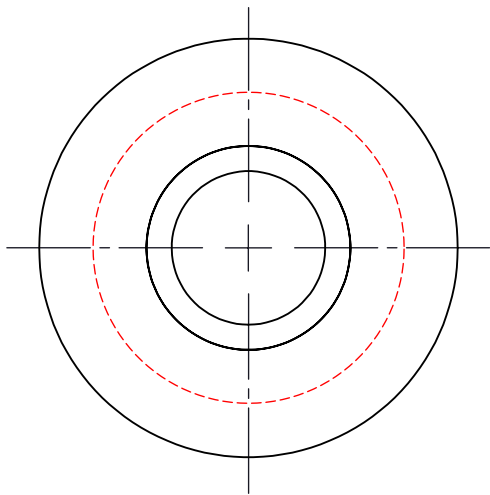

NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 40, 50, 60 OR 70 TO BE SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.

AR	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM
AR	ELASTOMER	K2011-3	\triangle	3
1	MK20-1	MK20-1		2
	K2011	K2011		1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.	SIGNATURE		DATE
	DRAWN	B. SENEAL	12/23/2014
	CHECK	S. BROWN	12/23/2014
	ENGR	B. SENEAL	12/23/2014
	QA		
STRESS			
APPR			

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X =
.XX = \pm 0.031
.XXX =
ANGLES = \pm 1°
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994



TITLE: K2011 SERIES VIBRO-INSULATOR WWW.KARMAN.COM		DWG. NO. K2011	REV 2
SIZE B	CAGE CODE	SCALE: 2:1	WEIGHT: N/A
DO NOT SCALE DRAWING		SHEET 1 OF 1	