
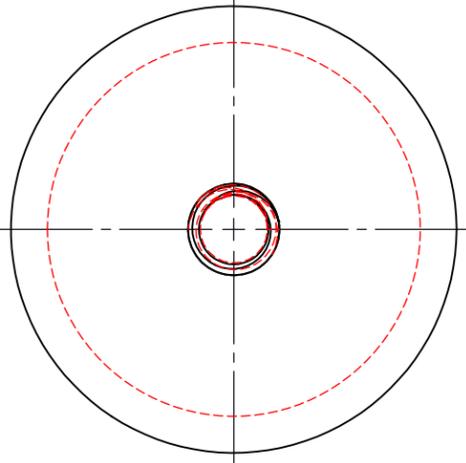
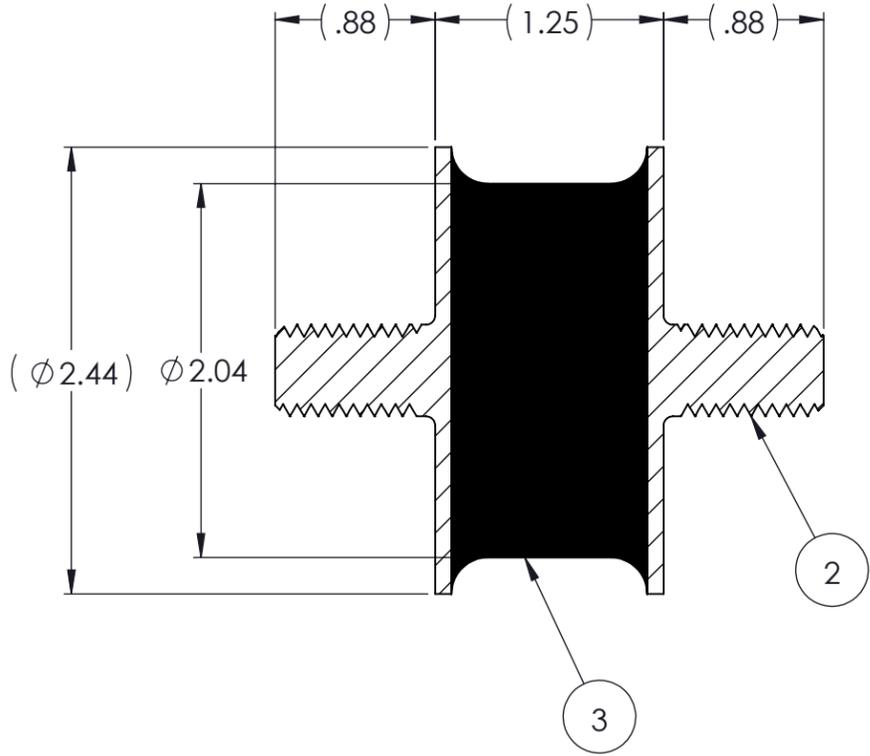


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	8/12/2014	BS
2	OD OF ELASTOMER IS ϕ 2.04, WAS ϕ 2.40. ADD NOTE 3.	8/22/2014	BS

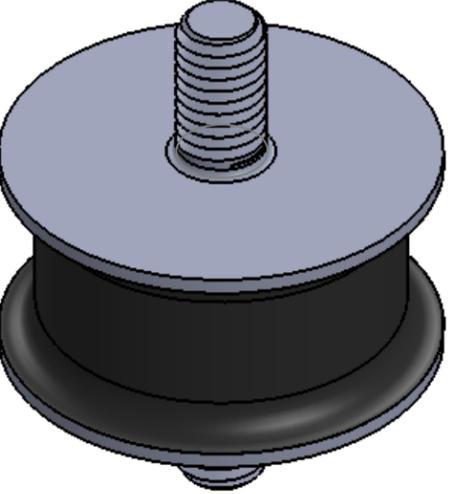

NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 40, 50, 60 OR 70 TO BE SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.
- 3 AVAILABLE WITH 1/2-13 UNC X 7/8" THREADS.

QTY.	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM
AR	ELASTOMER	K78-3		3
2	MK780	MK780		2
	K78	K78		1

PROPRIETARY AND CONFIDENTIAL		SIGNATURE	DATE	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .X = .XX = ± 0.031 .XXX = ANGLES = ± 1° INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.	DRAWN	B. SENEAL	08/12/2014	
	CHECK	S. BROWN	08/12/2014	
	ENGR	B. SENEAL	08/12/2014	
	QA			
	STRESS			
	APPR			



TITLE: K78 SERIES VIBRO-INSULATOR WWW.KARMAN.COM			
SIZE: B	CAGE CODE	DWG. NO. K78	REV 2
DO NOT SCALE DRAWING	SCALE: 1:1	WEIGHT: 10 OZ.	SHEET 1 OF 1