
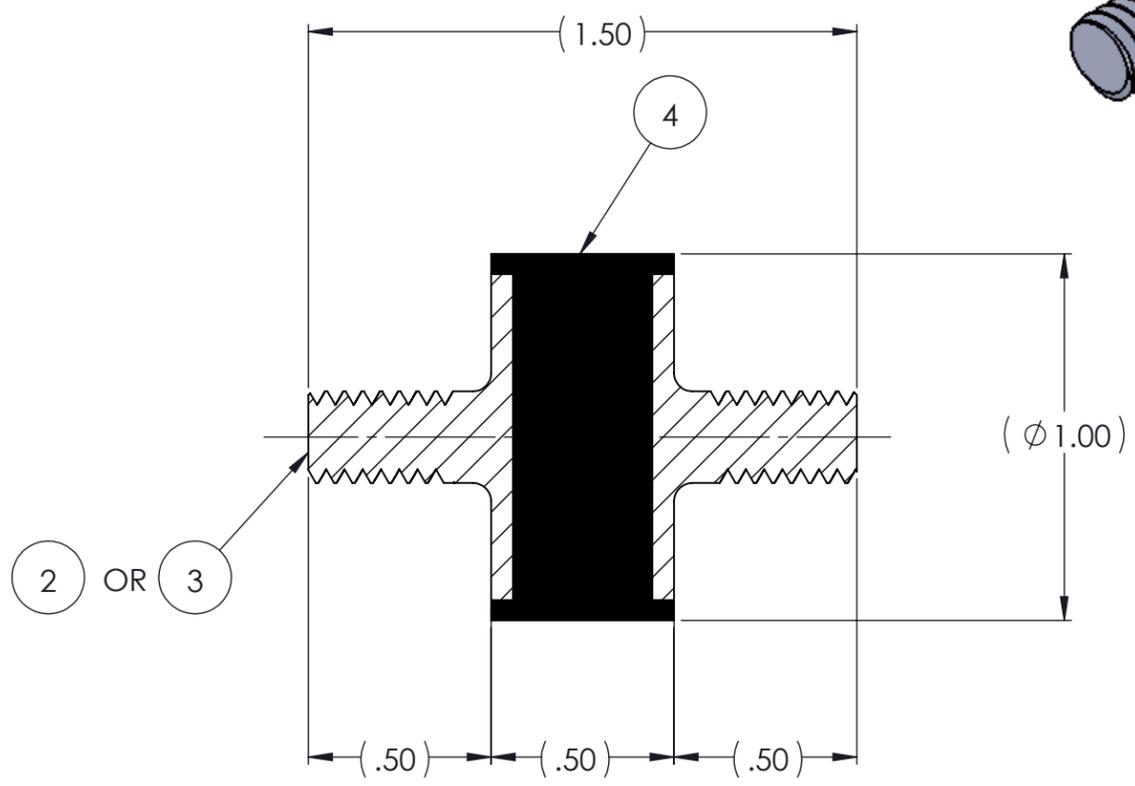
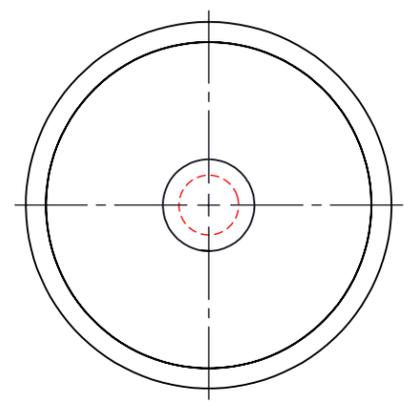


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE OF DRAWING	6/5/2014	BS
2	ADD NOTE 3.	9/23/2014	BS

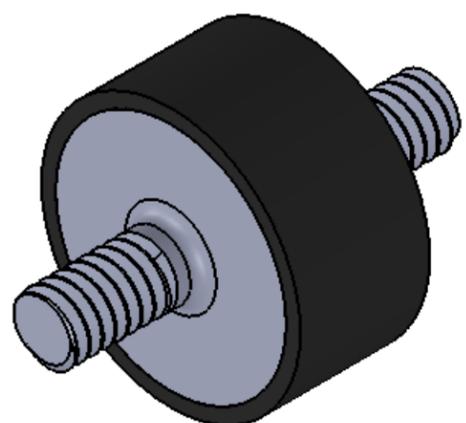


NOTES:

- 1 MATERIAL: ELASTOMER AND DUROMETER OF 40, 50, 60 OR 70 AS SPECIFIED.
- 2 ALL DIMENSIONS ARE REFERENCE.
- 3 AVAILABLE WITH THREADS OF 1/4-20 UNC X 1/2" AND M6 X 1.0 X 1/2".

AR	DESCRIPTION	PART NUMBER	MATERIAL OR NOTES	ITEM
AR	ELASTOMER	K84-4		4
2	1/4-20 UNC SCREW	MK470-AA		3
2	M6 X 1.0 SCREW	MK470-M6		2
	K84	K84		1

	SIGNATURE	DATE
DRAWN	B. SENECAI	06/05/2014
CHECK	S. BROWN	06/05/2014
ENGR	B. SENECAI	06/05/2014
QA		
STRESS		
APPR		

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 .X =  
 .XX = ± 0.031  
 .XXX =  
 ANGLES = ± 1°  
 INTERPRET GEOMETRIC  
 TOLERANCING PER:  
 ASME Y14.5M-1994

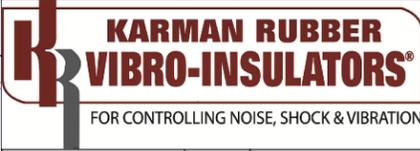

TITLE: K84 SERIES VIBRO-INSULATOR WWW.KARMAN.COM			
SIZE: <b>B</b>	CAGE CODE	DWG. NO. <b>K84</b>	REV <b>2</b>
DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT: .85 OZ. SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KARMAN RUBBER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KARMAN RUBBER IS PROHIBITED.